

# weber.pral D

## monocouche (one-coat) render



# scrape texture

## MASONRY BACKGROUND

facade systems

A one-coat through coloured cementitious render, in a range of colours, with a scraped texture finish.

**PRODUCT ONLY AVAILABLE IN IRELAND**

*weber.pral renders are designed for application on to sound medium density masonry suitable to take a designation III mix (1:1:6) - this should be confirmed by block manufacturer. The nature and condition of the background is a prime consideration in deciding the preparatory treatment prior to the application of **weber.pral D**. Guidance in respect to movement joints and bed joint reinforcement should be obtained from block manufacturer and **MUST** be adhered to. The recommendations detailed in BS5628 : Part 3 and BS5262 should be observed*

suitable masonry substrate or background prepared for rendering

**weber.rend aid** key coat mortar - if required to prepare substrate


**weber.pral D** one-coat render

**weber.pral D** allowed to take up and partially dry before scraping texture

render surface scraped back (2-3mm) when mortar partially set

scrape textured finish

In common with traditional renders **weber.pral D** may be subject to lime bloom. The occurrence of this may be reduced by proper protection and by avoiding application in adverse weather conditions, particularly in winter. The effect is not as noticeable on white or paler colours.

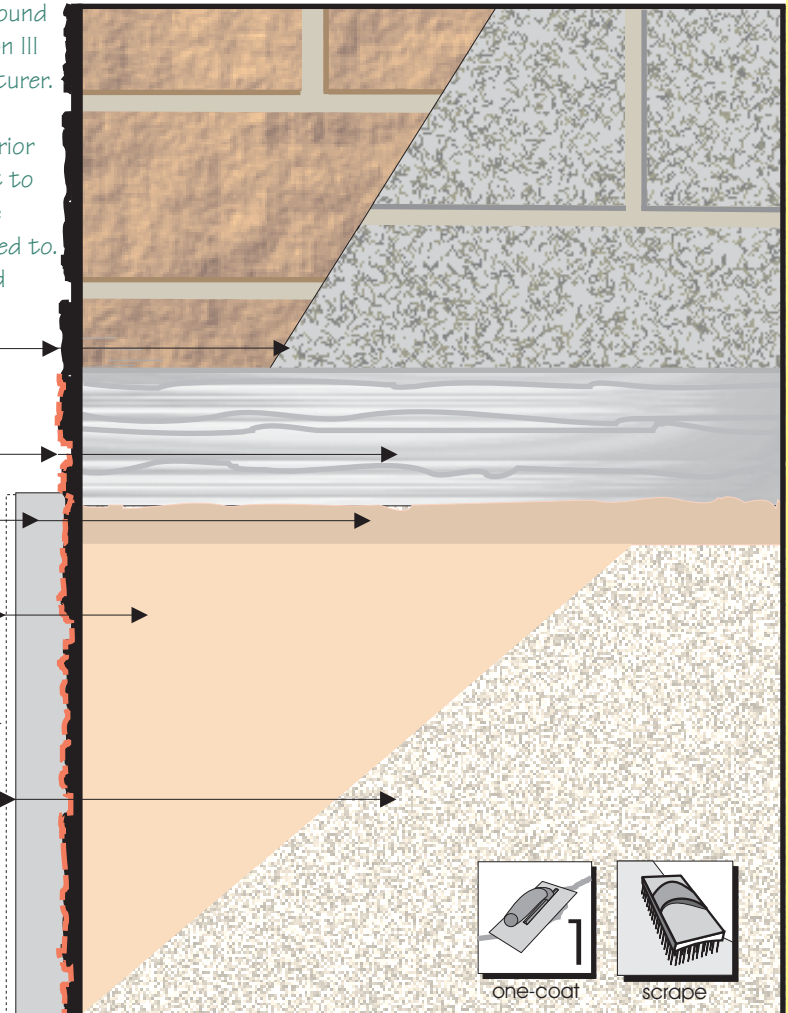

SYSTEM SECTION | SYSTEM VIEW



Price Guide for system applied

Issue date

### FOR THE DESIGNER....

**weber.pral D** scrape is a one-coat render, normally applied to a finished thickness of 15mm-25mm. The finished thickness depends on site exposure - refer to BS5262 for guidance  
**weber.pral D** is a through-coloured mortar and is available in a range of colours. The scrape texture is achieved by scratching the surface using a nail float. This operation is carried out when the mortar is almost dry and removes the surface laitence to leave a coloured face with a light pitted texture.

### FOR THE ESTIMATOR....

Materials and coverages in **weber.pral D** one-coat through coloured render -  
**weber.pral D** - 15mm (finished thickness) - 25 kg/m<sup>2</sup> in 25kg bags  
 other products (if specified)  
**weber.rend aid** key coat (if specified) - 3mm - 5 kg/m<sup>2</sup> in 25kg bags  
**weber.mesh** standard - 50x1m roll (100mm lap)

(refer to Product Data Sheet for information on **weber.rend aid**)

weber.pral D - scrape

This system is one of a range of comprehensive facade solutions covering external wall insulation, renders and concrete repair manufactured in the UK by **weber building solutions**

**FOR THE SPECIFIER . . . .** an outline specification in NBS format

**PROJECT:**

**SPECIFICATION CLAUSES.**

**M20 PLASTERED/RENDERED/ROUGHCAST COATINGS.**

To be read with Preliminaries/General conditions.

**TYPE [S] OF COATINGS.**

**160 weber PROPRIETARY ONE-COAT RENDER:**

**weber.pral D** – scrape textured finish

**PRODUCT ONLY AVAILABLE IN IRELAND**

- **Location:** To specified wall areas as identified on Architect's drawings or other Contract Documents.
- **Background:** Masonry suitable to take a designation III (1:1:6) mix (should be confirmed by block manufacturer).
- **Preparation:** The nature and condition of the background is a prime consideration in deciding the preparatory treatment prior to the application of **weber.pral D**. Substrate must provide suitable key / suction. Guidance in respect to movement joints and bed joint reinforcement should be obtained from block manufacturer and **MUST** be adhered to. The recommendations detailed in BS5628 : Part 3 and BS5262 should be observed.
- **Render Coat:**  
Proprietary reference: **weber.pral D** by **weber building solutions**.  
**Colour:** To be agreed  
**Thickness:**
- **Finish:** Scraped.
- **Angles – weber.pral renders:**  
Except where specified otherwise, form external angles using clean, straight chamfered timber battens.
- **Scraped finish – weber.pral D:**  
When the surface is sufficiently hard, normally between 5-16 hours after application, scrape the surface in small circular motions using a **weber** Scraping Tool to remove all laitance and bring the application to the specified thickness. Remove no more than 3mm from the surface thickness.  
Immediately after scraping, brush using a clean soft bristle brush to remove dust.  
Ensure scraped finish is even over the entire surface, with no areas missed.
- **Accessories:** Render only beads, if required by the system or product, or if specified, shall be of appropriate design, gauge and material as approved by **weber building solutions**. Beads to be located and fixed as detailed on Architect's drawings or System Manufacturer's details.  
Where meshcloth is being incorporated as treatment to areas of potential high stress it shall be **weber.mesh** standard a standard duty, balanced, open weave, glass fibre meshcloth, coated for alkaline resistance, available in 1m x 50m rolls.

**FOR THE APPLICATOR . . . .** an application overview

- **weber.pral D** is a self-coloured cementitious render. It is supplied as a blend of dry powders for one coat application, in one or two passes, by hand tools and requires only the addition of clean water to provide a durable, low maintenance render. An acceptable finish can be achieved by applicators with competent plastering skills that have been given specific product training.
- **Suitable Substrates:** New or Existing sound brickwork, blockwork or concrete suitable to take a designation III (1:1:6) mix. Substrate must provide suitable key / suction and incorporate movement joints and / or bed joint reinforcement as required by the brick / block manufacturer. The recommendations detailed in BS5628 : Part 3 and BS5262 should be observed.
- **Surface Preparation:** Dependant on type of substrate this could involve one or more of the following: -
  - **weber CL150** fungicidal wash to kill moss, algae or unseen spores
  - **weber.rend aid** to control suction or as a key coat to provide mechanical key
 Fit render only base (drip), stop and corner beads, where required, with fixings as approved by **weber**.
- **weber** recommend incorporating **weber.mesh** standard (meshcloth) into the first 5mm of render, or into the **weber.rend aid** key coat if being used, to areas of typical stress points in the construction, such as above and below openings, to reduce the risk of substrate cracking reflecting through the render.
- Mix and apply **weber.pral D** to specified thickness - this will be 3mm more than finished thickness. Rule off with a straight edge to achieve satisfactory in-plane surface. Remove all trowel marks, and after partial take-up, scrape back 2-3mm to develop the final colour and texture required.

General: Pre-bagged mortar must be stored completely dry and used in strict rotation of delivery. Stack tubs of wet mixed products no more than 2 high. Do not apply any formless wet materials in temperatures below 5°C. Do not work in high temperatures when flash setting of materials may occur. Provide adequate protection from frost, high winds and precipitation during application and curing. Apply all materials in accordance with full, detailed printed instructions.

Refer to current '**weber.pral** Site Specification' & relevant Product Data Sheets for further information.

**FOR FURTHER INFORMATION** contact

weber\_pral D - scrape

Regional / Area  
Sales Manager

Telephone  
Number

**weber building solutions**

**GB / HEAD OFFICE:** Dickens House, Enterprise Way, FLITWICK, Bedford MK45 5BY Tel: +44(0)1525 718 877 Fax: +44(0)1525 718 988  
**IRELAND:** Old Paper Mill, BALLYCLARE, Co Antrim BT39 9EB Tel: +44(0)28 9334 3700 Fax: +44(0)28 9332 3232

This document is the copyright of **weber building solutions** and must not be copied in part or in whole without permission